



THICKNESS 1.5MM



RE  
VO

R E V O L V E

L V E

TEXTURES THAT FEEL TOUGH  
AND FIRM YET GOOD!


OUR PRODUCTS



🌐 : [excluzio.in](http://excluzio.in) 📷 : [excluzio\\_decor](https://www.instagram.com/excluzio_decor) 📺 : [Excluzio Decor](https://www.facebook.com/ExcluzioDecor)



Surround  
yourself with  
**style and**  
comfort.



We at Excluzio akrilik believe in delivering the best laminates and Akrilik sheets to our clients all over India. And Excluzio Akrilik is so far India's leading surface decor brand working towards turning creative ideas into reality. At the heart of this visionary brand lies the motto of creating fresh designs every year. Its commitment to excellence shines through in its high-quality, visually appealing products, keeping them ahead of its competitors. Ever since years, we have walked on the path of success by delivering in- time. See you as the one of our cliental family members!



[www.excluzio.in](http://www.excluzio.in)

## ABOUT WARRANTY

Excluzio Akrilik sheets is the best option when it comes to installation.

During installation and post it, there are some issues that the clients face, which are majorly as below:

- 1. Sheet bending
- 2. Sheet color fading
- 3. Less hardness of sheets
- 4. Sheet tolerance
- 5. The defects of sheet
- Aiming for the sheet bending, sheet color fading, not enough hard sheet, sheet tolerance and sheet defect, Excluzio Akrilik will solve the problem case by case.
- We assure a warranty for Excluzio sheets that they will show no visible yellowing for 30 years. We guarantee that our sheets will retain their fire behavior even after 30 years of weathering.

## MERGE WITH EDGES

Edge bending and sustainability

To achieve a smooth sleek look, shiny and reflective surfaces like Akrilik sheets are the solution. The gloss edging and bandings with Excluzio protects orange peeling of the edges.

- Gloss level > 96 gloss points
- Incomparable surface calm (no orange peel)
- Monolithic look between board and edge.
- Wide range of colors combined with trending high gloss Akrilik sheets.
- Akrilik edge- banding made with same colour foil of Akrilik sheets.

Available Size :  
2440mm X 1220mm ( 8ft X 4ft) • Thickness : 1.5 mm

## CARE OF LAMINATES

- Use a particular plastic cleaner or mild soap and water to remove dirt and debris.
- When applying cleaner, use a non-abrasive lint-free or microfiber cloth.
- For tough grease, oil, or tar residue, use commercial grade hexane or kerosene.
- All solutions need to be wiped clean with fresh water and blotted dry to reduce and prevent water spotting.
- When cleaning Akrilik sheeting, never use ammonia, acetone, carbon tetrachloride, or gasoline as a cleaning solution.
- Don't store Akrilik in direct sunlight in hot conditions.
- Avoid storing Akrilik in extreme temperatures, above 100-degree Fahrenheit or 30 degree Celsius.
- Use a plastic polish, car polish, or automobile wax with a clean, microfiber cloth to repair the cracks.


## APPLICATIONS



Hotel



Healthcare



Furniture



Kitchen



Bathroom




Commercial

## Tips for a better installation and maintenance :

- Ensure the originality of products by checking the sticker on it before buying any of Excluzio Akrilik sheets.
- Once you receive the product, check no product has been damaged in the transportation. Only after inspecting, proceed further for installation.
- To avoid bubbles or wavy surface later, before installation, make sure the substrates (MDF, Particle Board, Plywood) is in good condition. Also check the surface is even and of similar thickness.
- There should be no dust or grease on the surface. So, clean it with the help of a cloth before putting Excluzio Akrilik Sheet on it.
- Use water based adhesives only and stir it well before using. Remember : Don't mix water in it.
- To get the best bonding forever, apply the adhesive uniformly using a brush, roller or adhesive spreader on both the surfaces, base and Akrilik sheet.
- To be able to remove air between the Akrilik sheet and the base, keep minimum 2mm gap between two laminates while applying. Use soft pinch roller or normal pressing technique and the pressing should be done from the middle of the panel and move towards the sided line and corners.
- Full bonding strength is achieved only when given sufficient amount of pressing after adhesive application that is, minimum 12 to 15 hours.
- After installation, remove the protective film within 7 to 15 days.

## W H A T S I N S I D E

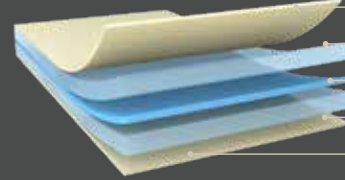

6H anti-scratch Coating  
Akrilik Layer  
Glue line  
PVC Based Film Layer  
Primer coating



EASY FILM REMOVAL  
IN 6 OR 7 DAYS OF APPLICATION



INTIMIDATE OPENING OF THE ROLL  
WITHOUT PRESSURIZING IS MUST



USE MILD CLEANERS FOR  
AN EVERLASTING SHINE.



SHAKE IT WELL AND LIGHTLY  
SPRAY ON THE SURFACE



WIPE THE SURFACE CLEAN USING  
A LIGHT CIRCULAR MOTION


Excluzio Akrilik is not responsible for any damage, cracks, bubbles or colour fading if the sheets are not checked when delivered and are not properly applied as instructed above.

Colour variations in the material from different batches are likely to notice. Hence, it is better to use same batch material. Actual colours of the laminates or acrylic edge banding may vary slightly from this brochure.

## REASONS FOR AIR BUBBLE FORMATION ON LAMINATES




High temperature and humid conditions are created to bond the sheets



Uneven surface can cause debonding and bubbles



Use of water base synthetic resin adhesive or any other the PEVA (Polyethylene Vinyl Acetate Co-polymer) is used.



Insufficient pressure during the bonding will look like this



When substrate loses moisture after installation



Use of extremely large Akrilik/ PVC laminate sheets (more than 8 ft x 2 ft long)





TERMITE &  
BORER FREE



1.5MM  
THICKNESS



LIGHT  
WEIGHT



DURABILITY  
& STRENGTH



IDEAL FOR  
VERTICAL  
APPLICATION



WATER &  
STAIN PROOF




# CRAFTINESS

Enjoy the best artworks and



EX - 307 SYRUP

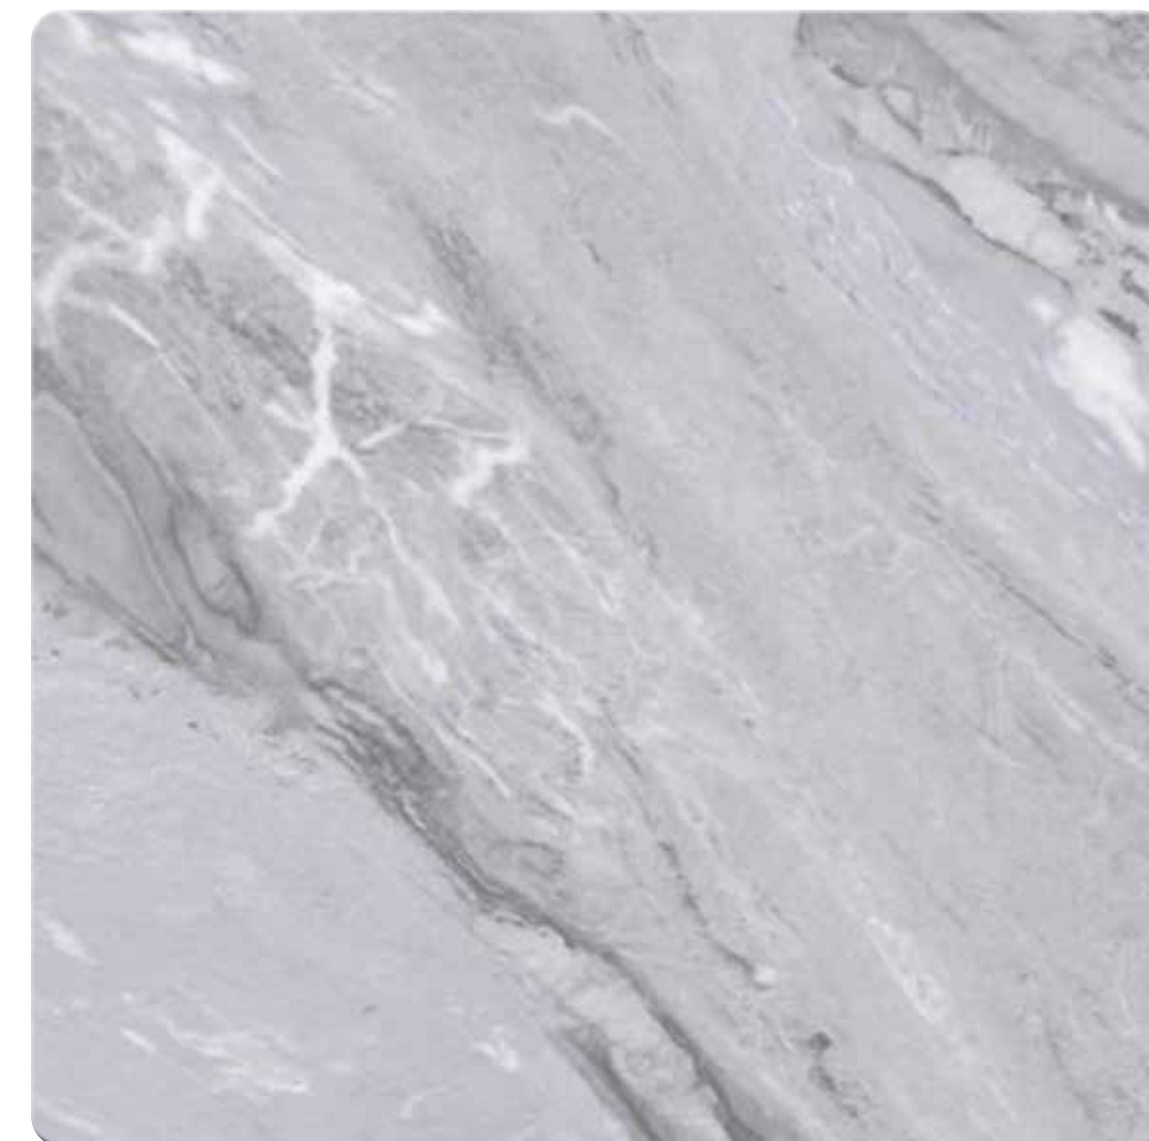

EX - 904 STEEL GREY MARBLE







- TERMITE & BORER FREE
- 1.5MM THICKNESS
- LIGHT WEIGHT
- DURABILITY & STRENGTH
- IDEAL FOR VERTICAL APPLICATION
- WATER & STAIN PROOF



EX - 111 MARFIL



EX - 903 VERDE FOREST MARBLE



Here is the best marble

EDITION

3 EDGE BANDING AVAILABLE





- TERMITE & BORER FREE
- 1.5MM THICKNESS
- LIGHT WEIGHT
- DURABILITY & STRENGTH
- IDEAL FOR VERTICAL APPLICATION
- WATER & STAIN PROOF



When you have bunch of photos to

SHARE




EX - 122 HEX



EX - 902 ZIGZAG MARBLE



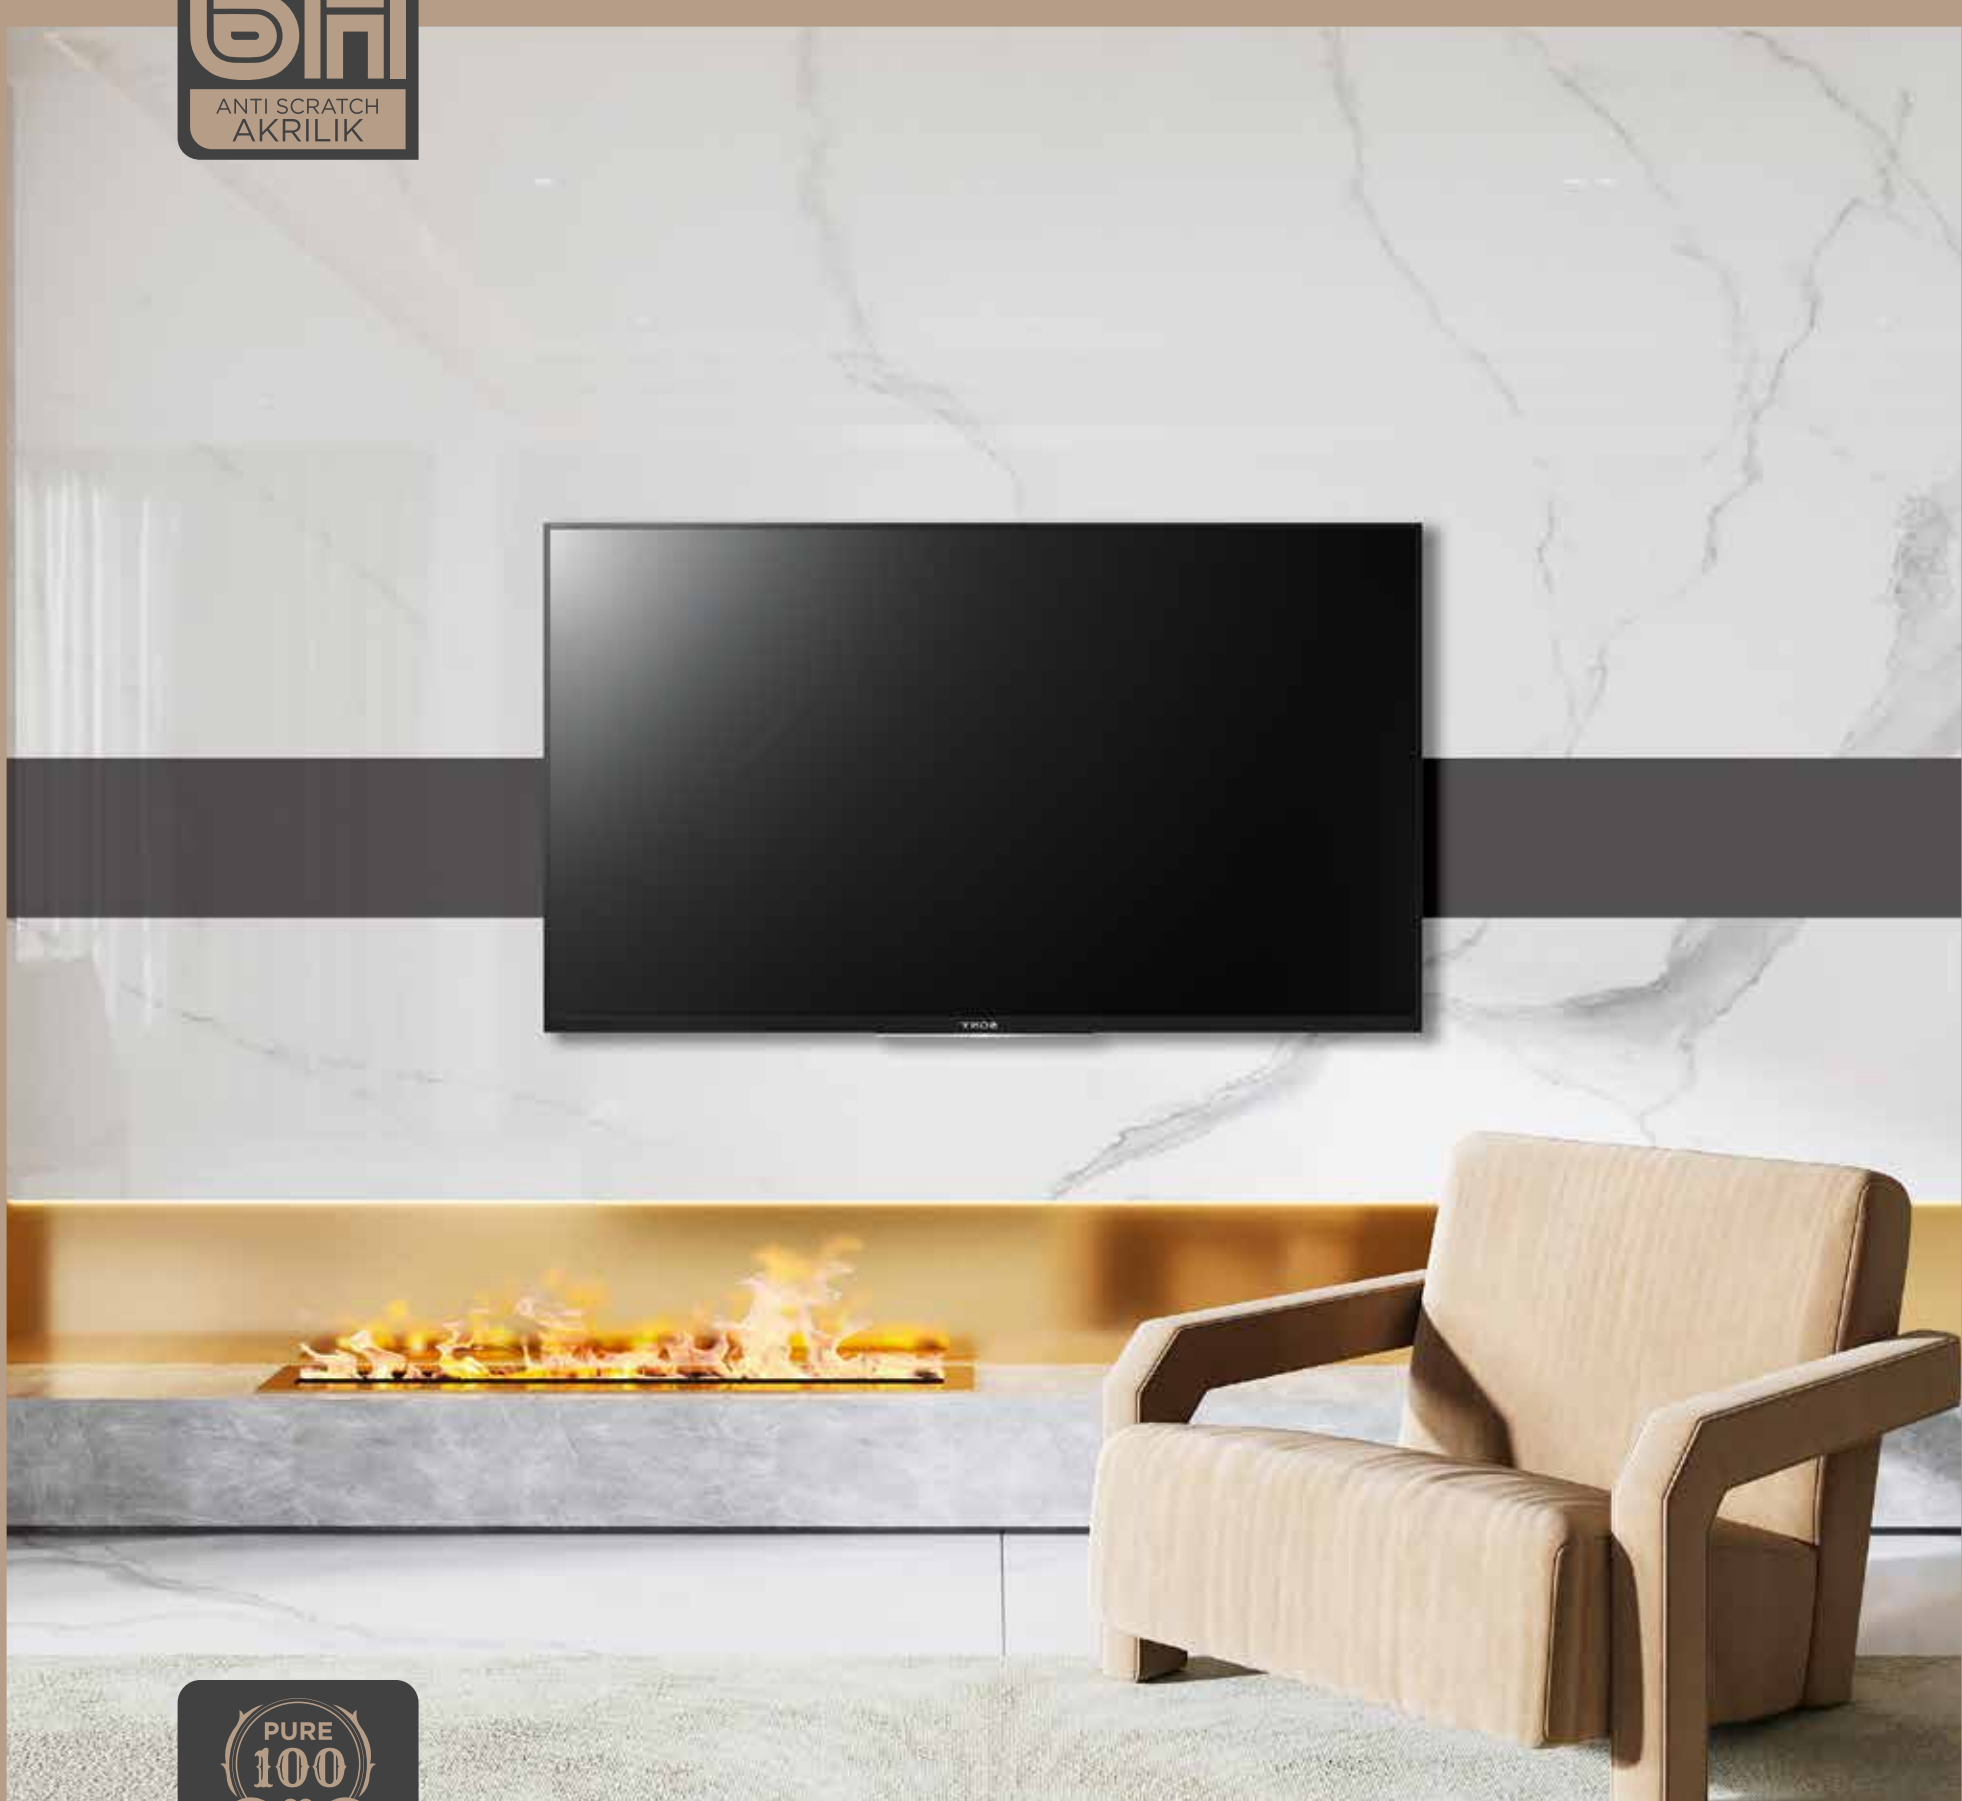

- TERMITE & BORER FREE
- 1.5MM THICKNESS
- LIGHT WEIGHT
- DURABILITY & STRENGTH
- IDEAL FOR VERTICAL APPLICATION
- WATER & STAIN PROOF



EX - 110 CARBON



EX - 901 STATUARIO MARBLE



Let us help you appreciate every moment of

LIVING

3 EDGE BANDING AVAILABLE






- TERMITE & BORER FREE
- 1.5MM THICKNESS
- LIGHT WEIGHT
- DURABILITY & STRENGTH
- IDEAL FOR VERTICAL APPLICATION
- WATER & STAIN PROOF



EX - 703 BROWN WALNUT

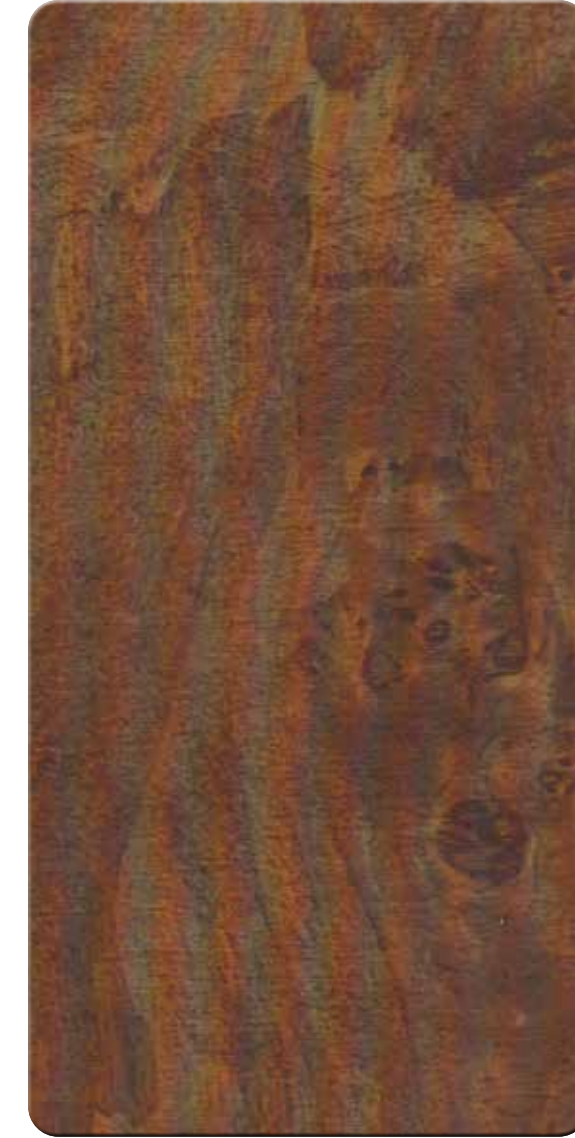

EX - 701 BERGER WALNUT



EX - 702 TEAK WOOD



Because nature is the best

# STYLIST

3 EDGE BANDING AVAILABLE





TERMITE &  
BORER FREE



1.5MM  
THICKNESS



LIGHT  
WEIGHT



DURABILITY  
& STRENGTH



IDEAL FOR  
VERTICAL  
APPLICATION



WATER &  
STAIN PROOF




# MULTI CONES

The weather outside will always match your



EX - 112 TURQUOISE

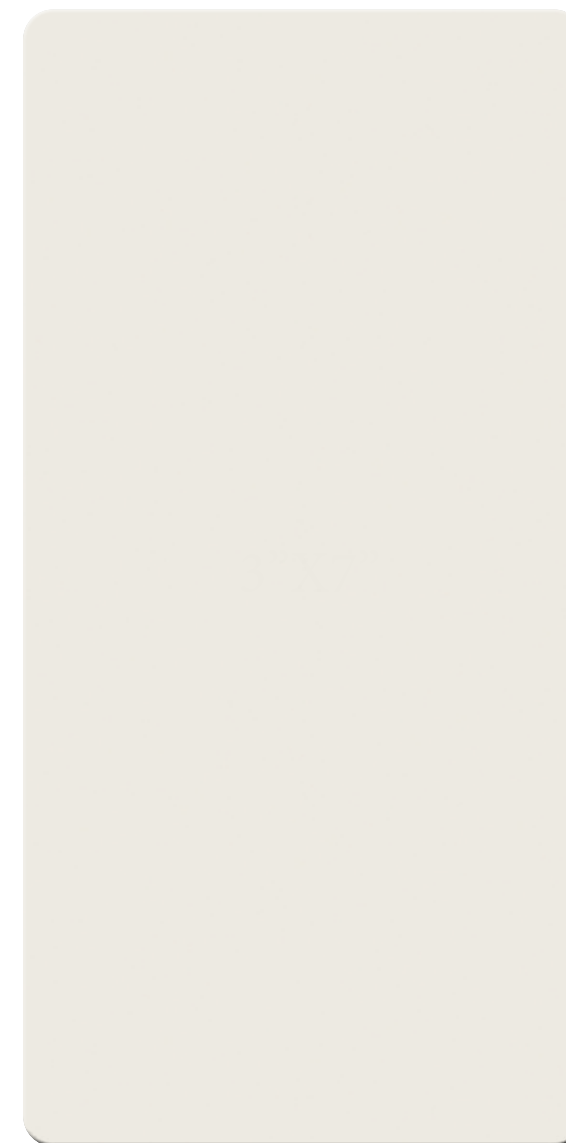

EX - 101 FROSTY




EX - 114 LIMA




- TERMITE & BORER FREE
- 1.5MM THICKNESS
- LIGHT WEIGHT
- DURABILITY & STRENGTH
- IDEAL FOR VERTICAL APPLICATION
- WATER & STAIN PROOF



EX - 113 AGUAMARINA



EX - 124 VERDE



EX - 120 MENTA

So, there will be no dark or dull

# CORNERS

3 EDGE BANDING AVAILABLE





TERMITE &  
BORER FREE



1.5MM  
THICKNESS



LIGHT  
WEIGHT



DURABILITY  
& STRENGTH



IDEAL FOR  
VERTICAL  
APPLICATION



WATER &  
STAIN PROOF




# PREVAIL

Let your inner perfectionist on style



EX - 309 FORTNUM




EX - 506 MINT




EX - 111 MARFIL



- TERMITE & BORER FREE
- 1.5MM THICKNESS
- LIGHT WEIGHT
- DURABILITY & STRENGTH
- IDEAL FOR VERTICAL APPLICATION
- WATER & STAIN PROOF



EX - 116 CIAN

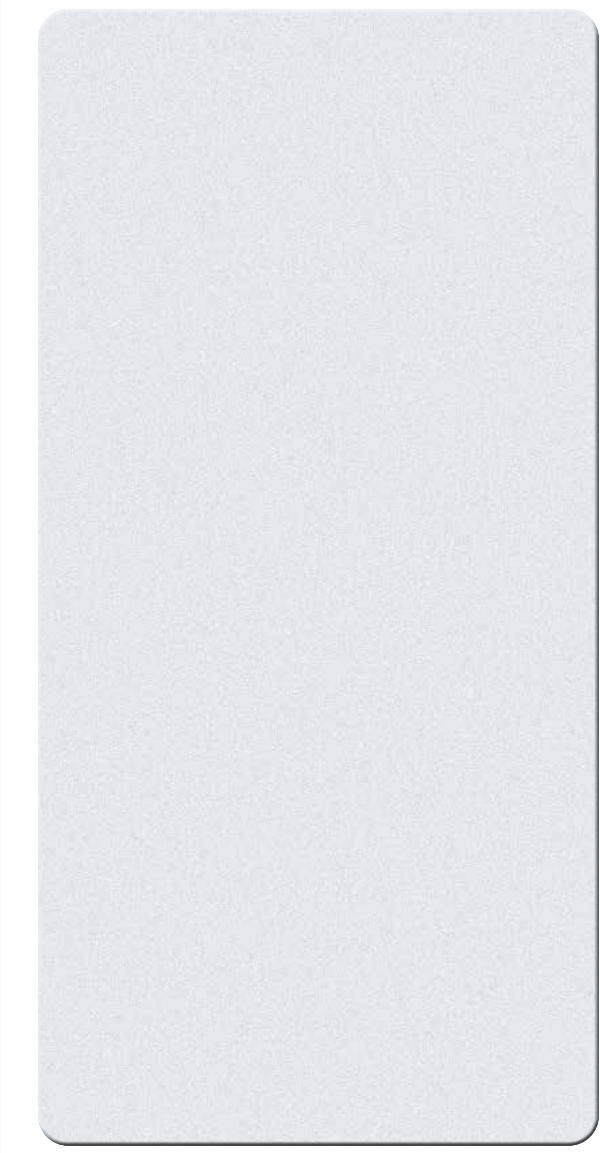

EX - 504 OPAL WHITE



EX - 115 AZUL

Which of these sooting colors would you

# CHOOSE

3 EDGE BANDING AVAILABLE





TERMITE &  
BORER FREE



1.5MM  
THICKNESS



LIGHT  
WEIGHT



DURABILITY  
& STRENGTH



IDEAL FOR  
VERTICAL  
APPLICATION



WATER &  
STAIN PROOF




# EFFECT

Everything in a space has a compounding



EX - 106 NUEZ




EX - 102 ONYX



EX - 107 SEPIA


3 EDGE BANDING AVAILABLE

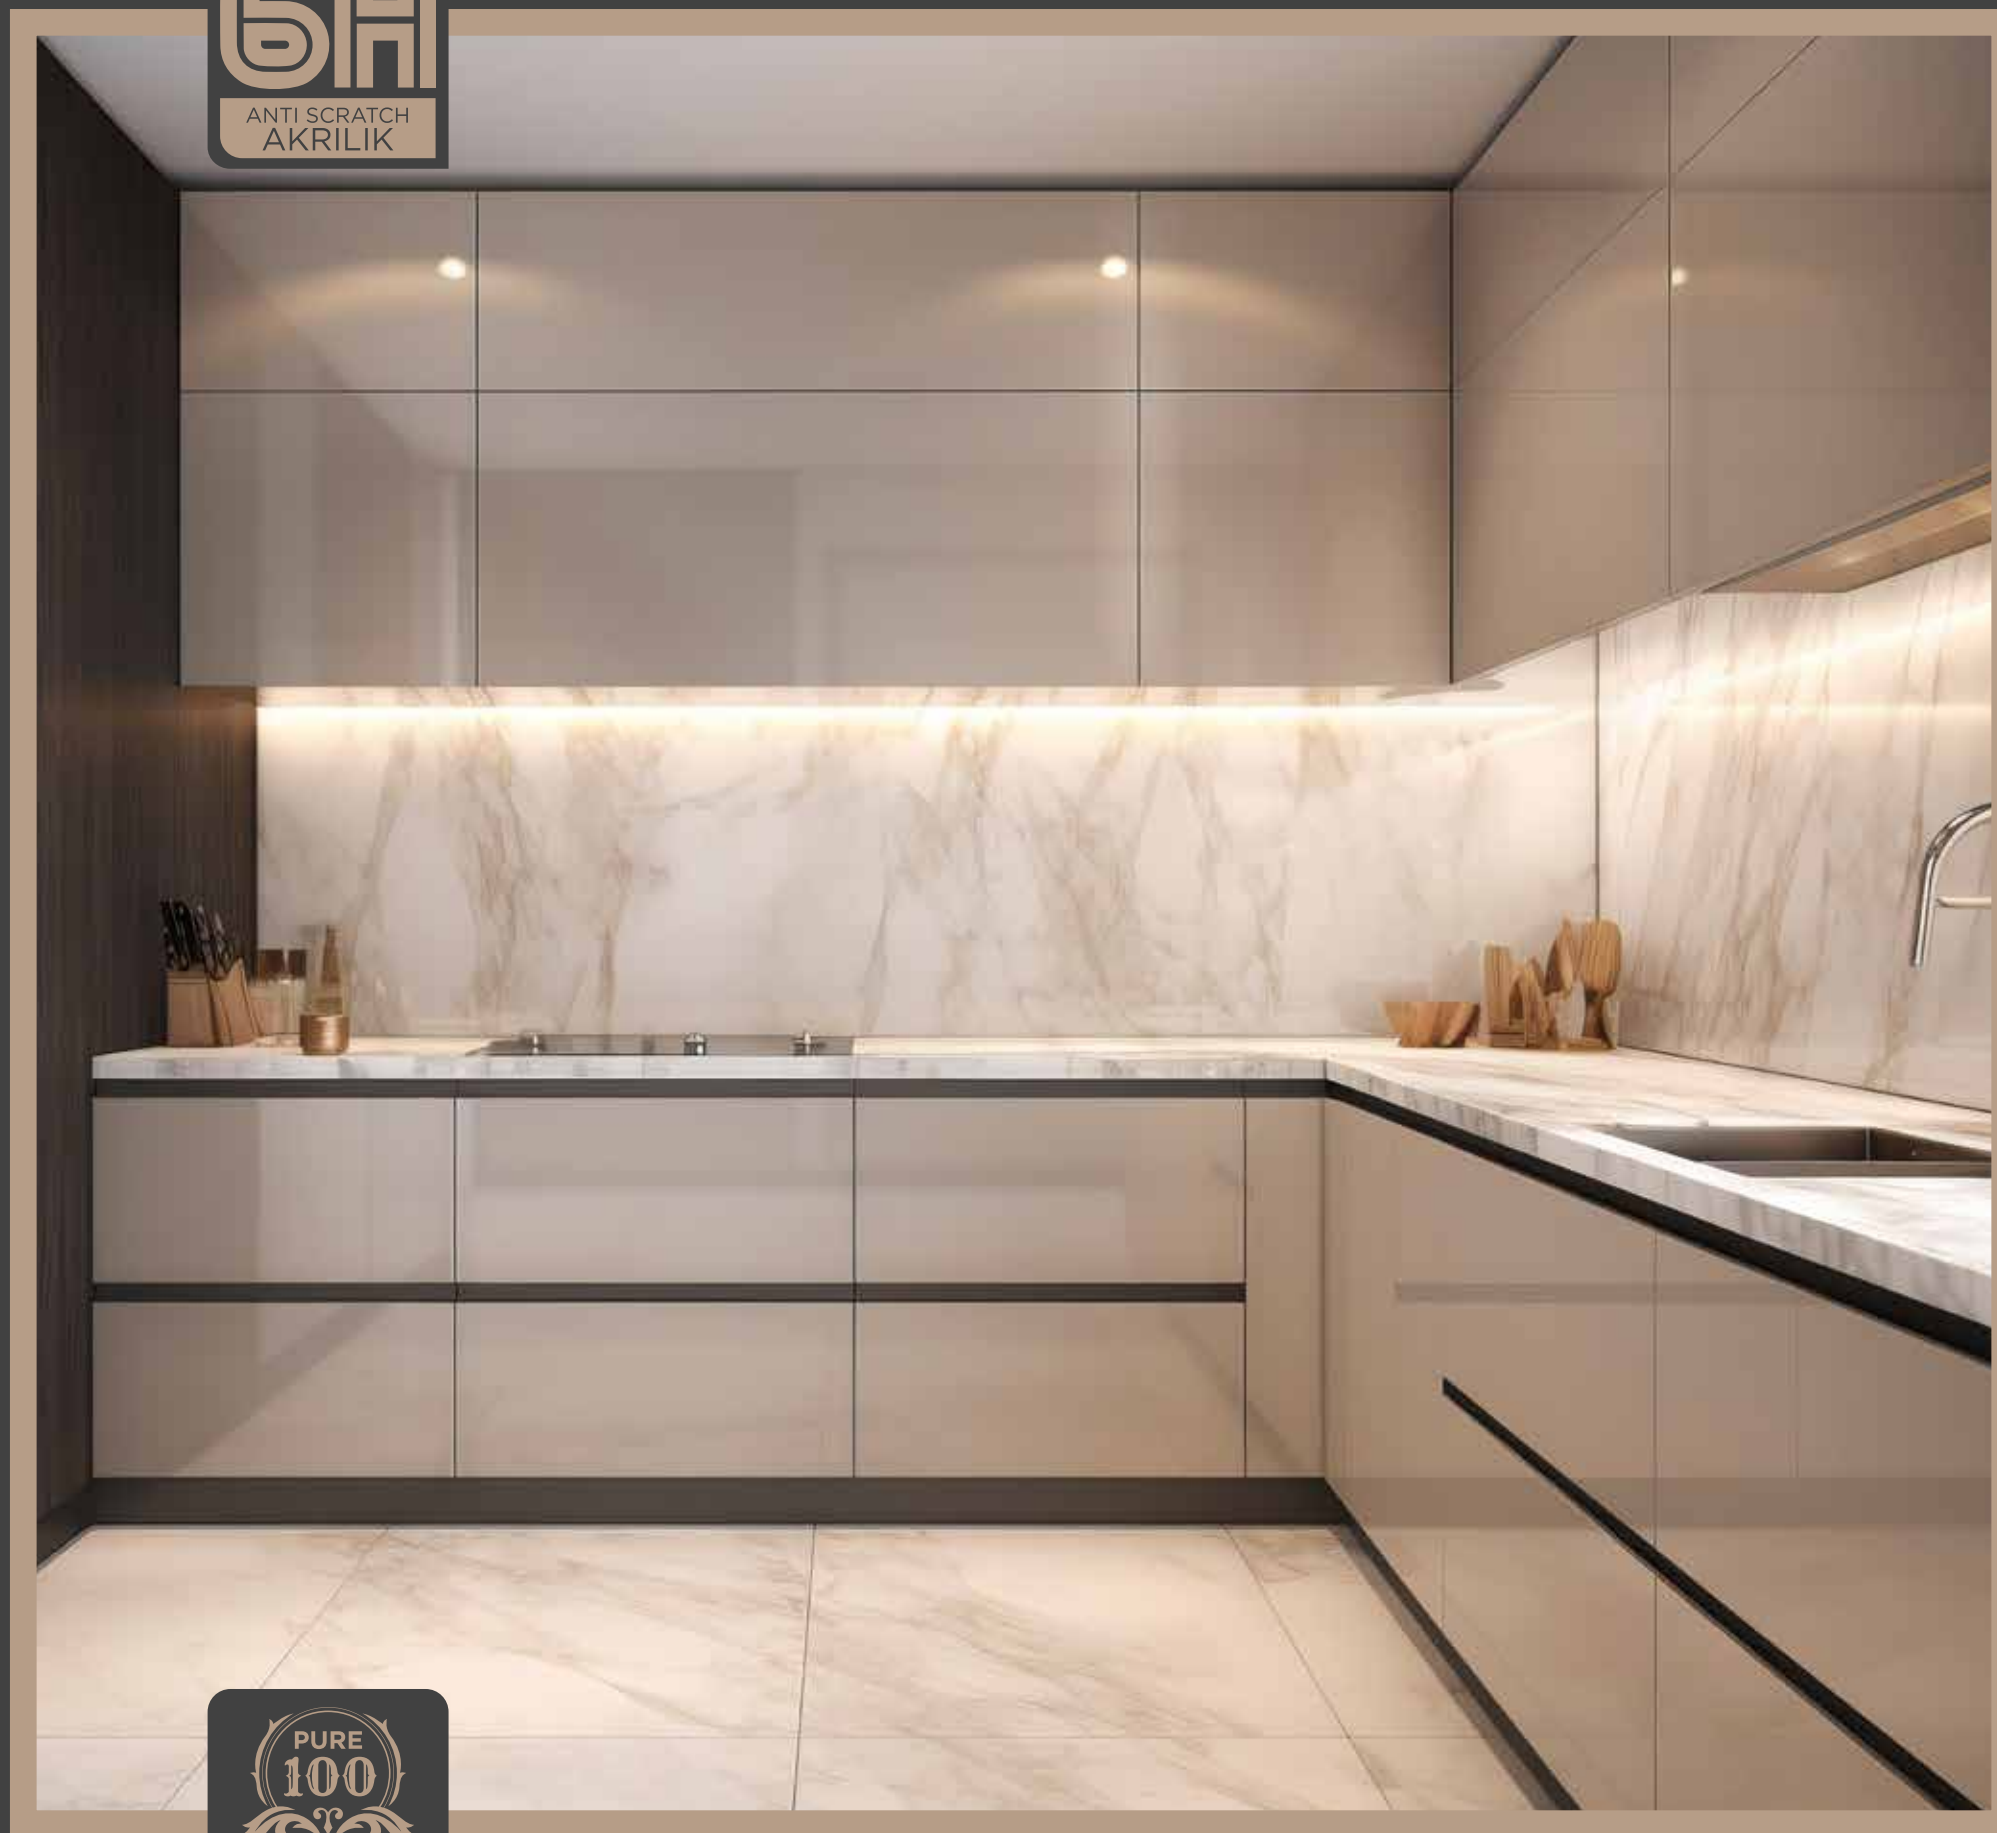

- TERMITE & BORER FREE
- 1.5MM THICKNESS
- LIGHT WEIGHT
- DURABILITY & STRENGTH
- IDEAL FOR VERTICAL APPLICATION
- WATER & STAIN PROOF



EX - 502 CAREMAL



EX - 501 WHEC



EX - 505 CHESTNUT



Let the vibe be slow and

STEADY

EDGE BANDING AVAILABLE





TERMITE & BORER FREE



1.5MM THICKNESS



LIGHT WEIGHT



DURABILITY & STRENGTH



IDEAL FOR VERTICAL APPLICATION



WATER & STAIN PROOF



# FUTURE

When it comes to interior, don't save for the



EX - 301 NARANJA



EX - 307 SYRUP



EX - 306 OXFAM




EDGE BANDING AVAILABLE



- TERMITE & BORER FREE
- 1.5MM THICKNESS
- LIGHT WEIGHT
- DURABILITY & STRENGTH
- IDEAL FOR VERTICAL APPLICATION
- WATER & STAIN PROOF



EX - 118 CEDRO



EX - 103 BLANCO



EX - 109 SKYE

We know already your favorite

COLORS

3 EDGE BANDING AVAILABLE






# ENGAGEMENT

It's time for your space to get full



EX - 122 HEX

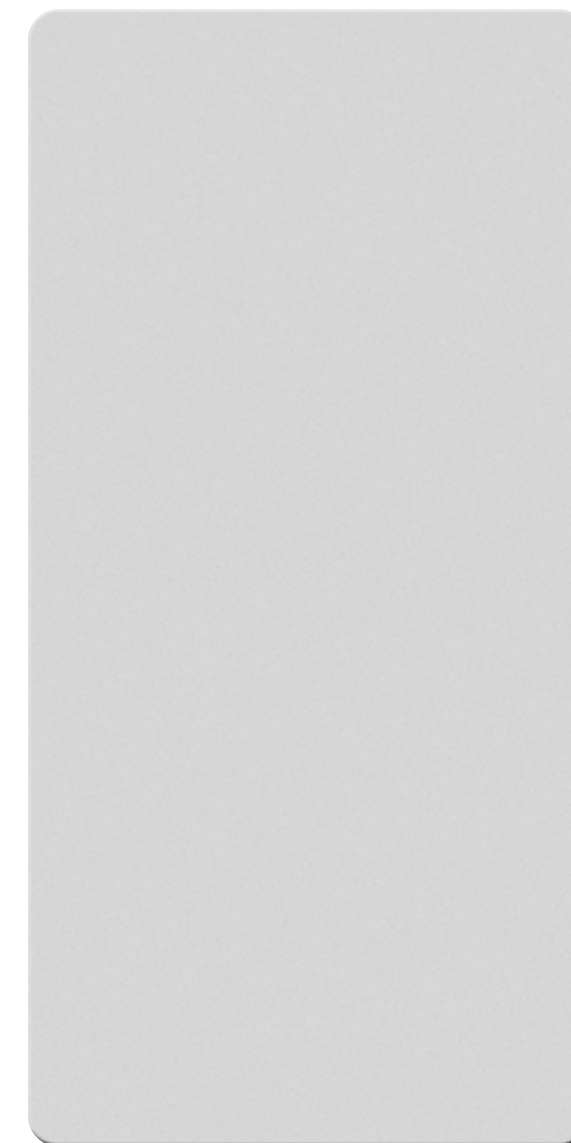

EX - 127 CORNSILK




EX - 110 CARBON



- TERMITE & BORER FREE
- 1.5MM THICKNESS
- LIGHT WEIGHT
- DURABILITY & STRENGTH
- IDEAL FOR VERTICAL APPLICATION
- WATER & STAIN PROOF



EX - 117 COIN



EX - 108 SNOWY



EX - 119 ALICE

Some kind of old vintage feel twisted with

# TRENDS

3 EDGE BANDING AVAILABLE





- TERMITE & BORER FREE
- 1.5MM THICKNESS
- LIGHT WEIGHT
- DURABILITY & STRENGTH
- IDEAL FOR VERTICAL APPLICATION
- WATER & STAIN PROOF



# VISION

Keep up your own unique style and



EX - 121 ROJO



EX - 105 HUESO



EX - 308 PECAN



3 EDGE BANDING AVAILABLE




- TERMITE & BORER FREE
- 1.5MM THICKNESS
- LIGHT WEIGHT
- DURABILITY & STRENGTH
- IDEAL FOR VERTICAL APPLICATION
- WATER & STAIN PROOF



EX - 128 DESENT BLACK



EX - 104 BAYSH

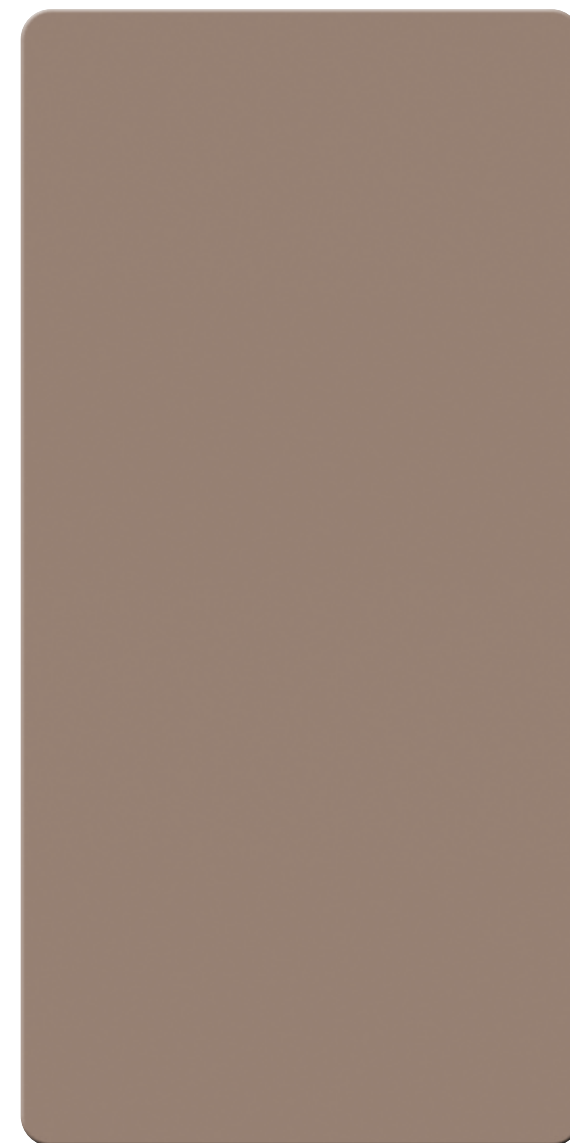

EX - 305 TORTILLA



Change the feels to something more

MOSAIC

EDGE BANDING AVAILABLE





TERMITE &  
BORER FREE



1.5MM  
THICKNESS



LIGHT  
WEIGHT



DURABILITY  
& STRENGTH



IDEAL FOR  
VERTICAL  
APPLICATION



WATER &  
STAIN PROOF



# COMBINATIONS

Best for the soft light and great



EX - 302 ALMENDRA



EX - 303 CAFE



EX - 311 CAMEL COAT




3 EDGE BANDING AVAILABLE




- TERMITE & BORER FREE
- 1.5MM THICKNESS
- LIGHT WEIGHT
- DURABILITY & STRENGTH
- IDEAL FOR VERTICAL APPLICATION
- WATER & STAIN PROOF



EX - 304 RUSSET

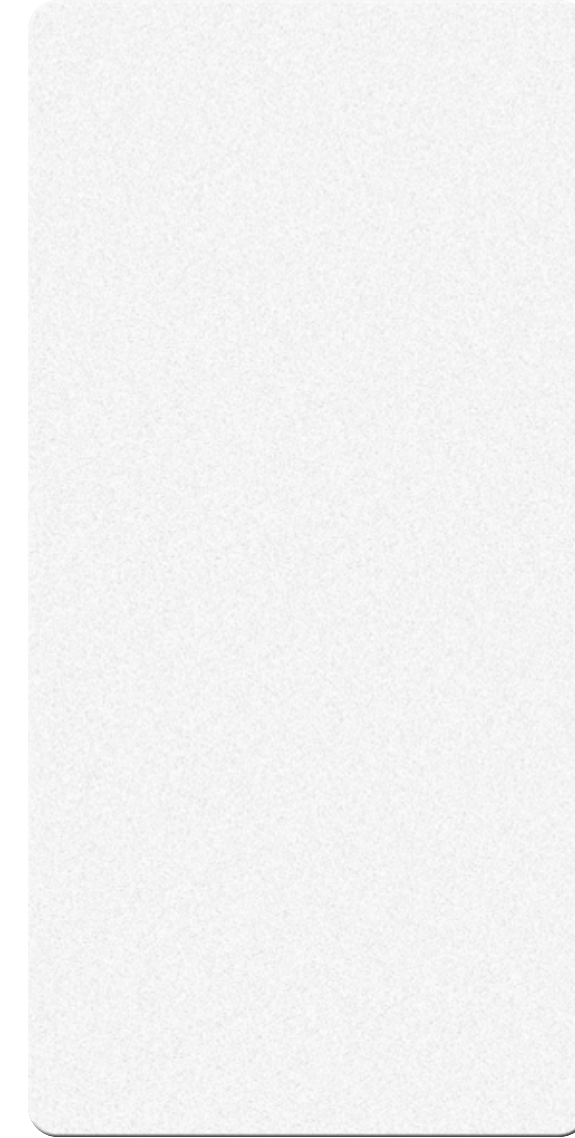

EX - 503 MIST WHITE

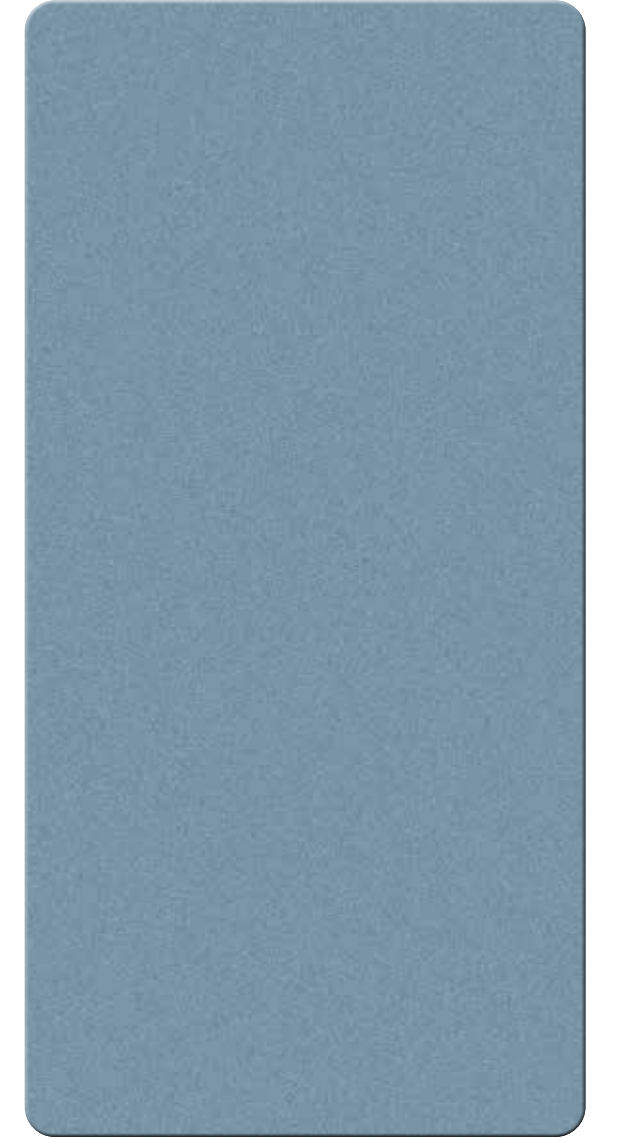

EX - 310 BOAT BLUE



Energetic environment and warmth

TOGETHER

3 EDGE BANDING AVAILABLE





# APPROACH


Highest standards and the soft



EX - 125 MORAH




EX - 126 TUSCANY YELLOW



EX - 123 DARK HONEY

3 EDGE BANDING AVAILABLE

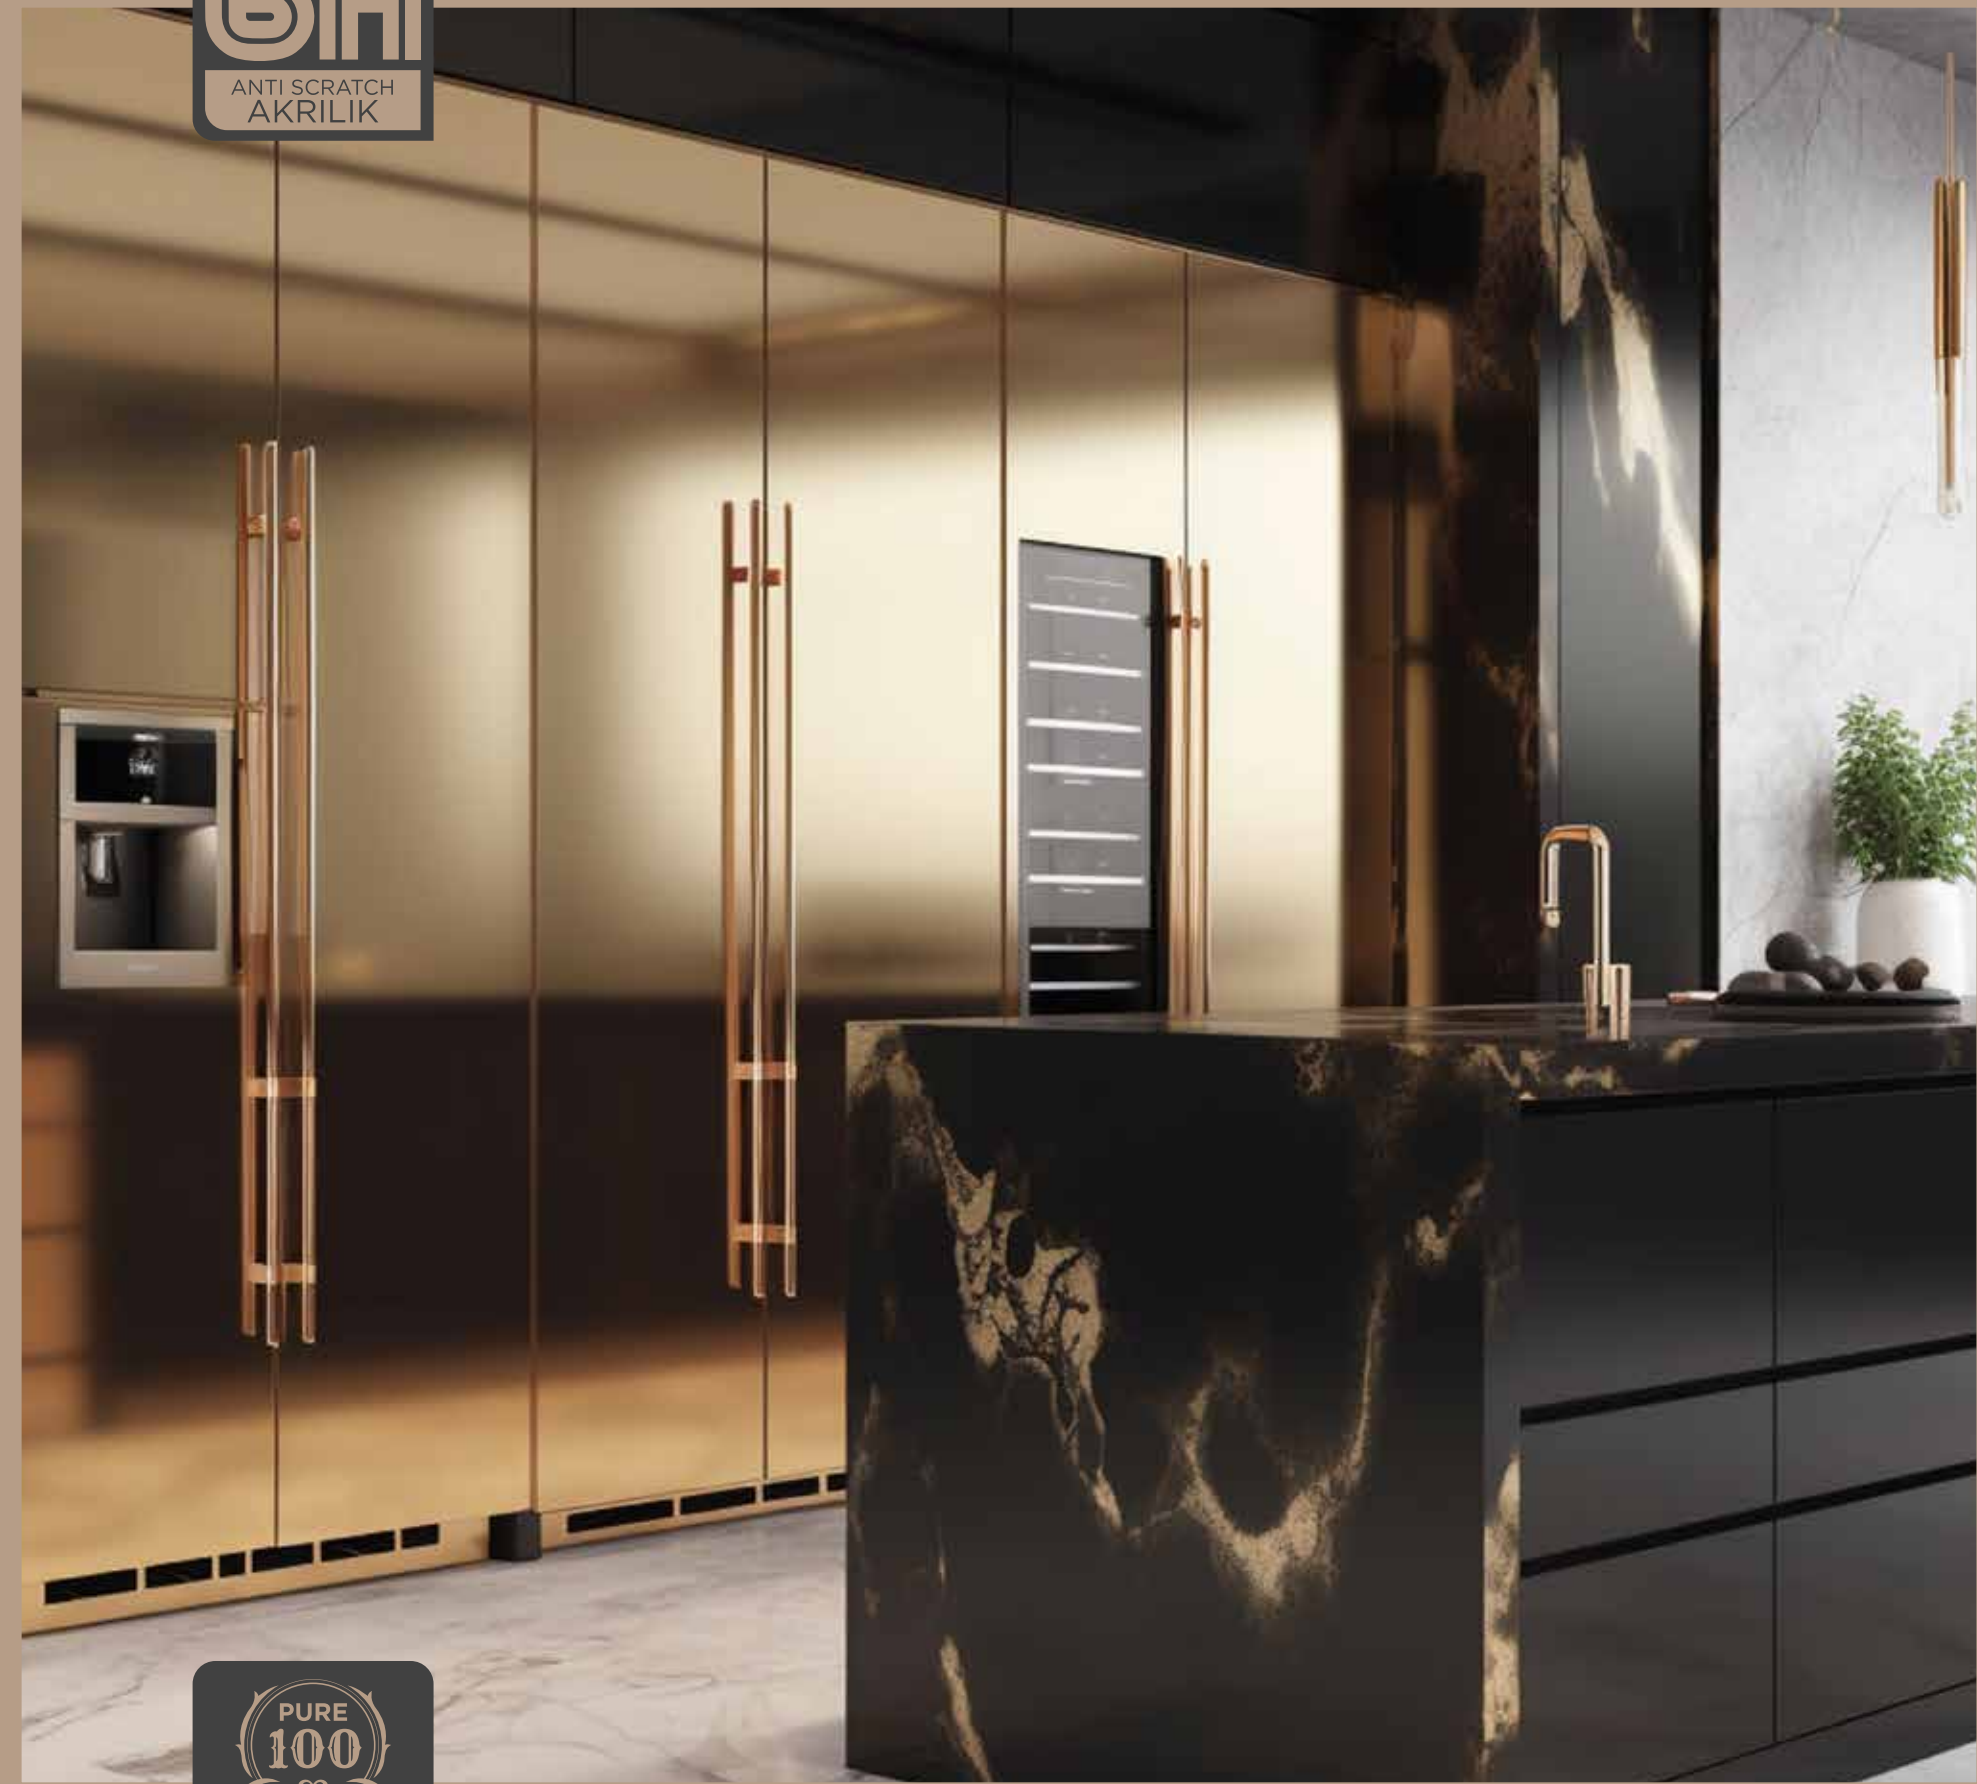

Golden hours are better fest with these

# LAMINATES



1001 GOLD MIRROR



1004 DARK GREY



1003 ROSE GOLD MIRROR



1002 SILVER MIRROR



3 EDGE BANDING AVAILABLE



# REVERENT

Where the soothing whispers and soul finds solace!

COMING SOON

COMING SOON

COMING SOON

COMING SOON


COMING SOON

COMING SOON

# SPIRITUAL

Each corner carries the essence of spiritual serenity!

## Edge Banding

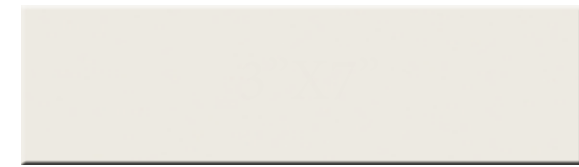

EB - 101



EB - 102



EB - 105



EB - 108



EB - 111



EB - 114



EB - 103



EB - 106



EB - 109



EB - 112



EB - 115



EB - 104



EB - 107



EB - 110



EB - 113



EB - 116



EB - 117




EB - 120



EB - 123



EB - 126

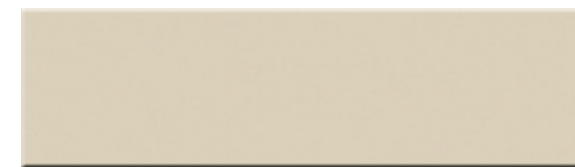

EB - 301



EB - 304



EB - 118



EB - 121



EB - 124



EB - 127



EB - 302



EB - 305



EB - 119



EB - 122



EB - 125



EB - 128



EB - 303



EB - 306





EB - 307



EB - 308




EB - 309



EB - 310



EB - 311

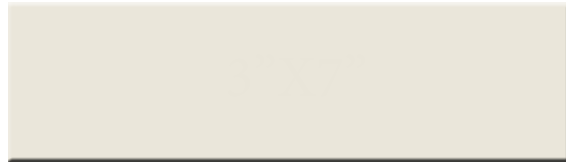

EB - 501



EB - 502



EB - 503



EB - 504



EB - 505



EB - 506



EB - 701



EB - 901



EB - 902



EB - 702



EB - 903



EB - 904



EB - 703



TERMITE & BORER FREE



1.5MM THICKNESS



LIGHT WEIGHT



DURABILITY & STRENGTH



IDEAL FOR VERTICAL APPLICATION



WATER & STAIN PROOF

# TECHNICAL SPECIFICATION

Parameters	Akrilik Laminate	High Gloss Laminate Mica	PU Coating/ Duco Paint	Back Painted Glass
Gloss Level	>90	>70	>85	>85
Scratch Proof	Anti Scratch	NO	NO	NO
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange Peel	NO	YES	YES	NO
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
DRY Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	NO	YES	YES	YES